

Project Name:

Location:

Item:

Qty.:

Model:

MCR-23GD

REACH IN GLASS DOOR REFRIGERATOR



MODEL MCR-23GD

FEATURES

Maxx Cold reach-in refrigerators are built to last. All units feature a bottom mount compressor to provide energy savings and ease of service. The temperature is digitally controlled and easily viewed from the exterior of the cabinet. Stainless steel construction ensures years of long life and maximum durability. Maxx Cold units are designed with energy savings in mind.

- Single glass door for visual appeal.
- Stainless steel exterior and interior ensures years of long life and maximum durability
- Simple plug-in installation
- Internal storage capacity is 23 cu. ft / 651 L
- CFC-free polyurethane foam insulation
- (3) heavy-duty, adjustable, PE coated wire shelves
- Door locks and 4" diameter swivel casters come standard
- Utilizes environmentally friendly CFC-free R134A refrigerant,
- Bottom mount compressor provides energy savings and ease of service
- Automatic defrost system
- Digitally controlled temperature system maintains optimum temperature and LED display is easily viewed from exterior
- Holding Temperature: 28°F/-2°C to 39°F/4°C
- Open door alert, beeps when door has been open for 5 minutes
- Large evaporator and condenser for quick cooling and greater efficiency
- Horsepower: 1/3 HP
- Automatic interior lighting
- Self contained system




Specifications subject to change without notice.

Approvals:

MCR-23GD

MAXXCOLD GLASS DOOR REFRIGERATOR

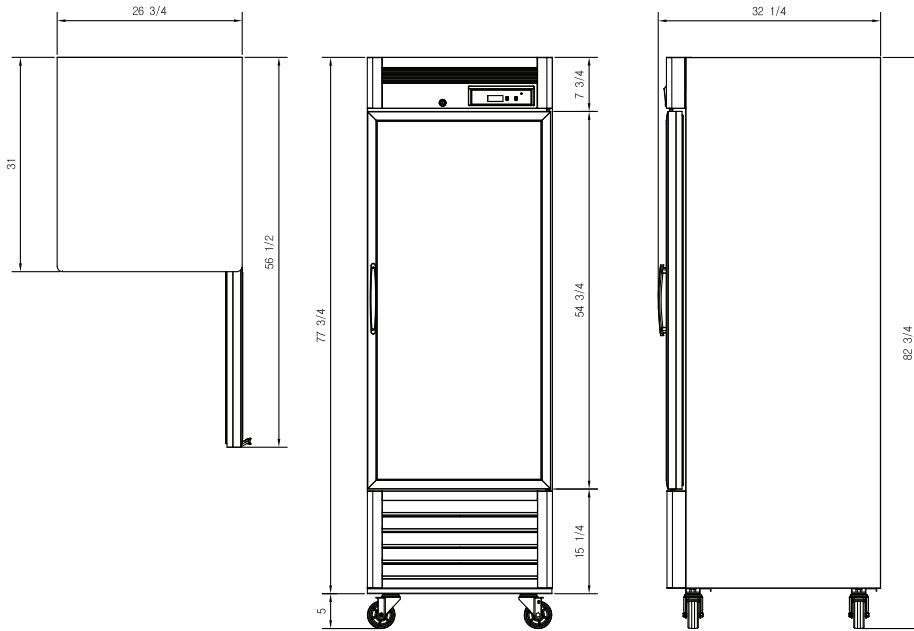

Dimensional Data

Model	Width	Depth	Height	Weight	Voltage	Hp	Amps	Refrigerant	Cubic Ft.	Holding Temperature
MCR-23GD	28" 711 mm	31" 787 mm	83" 2108 mm	310 lb 141 kg.	115V/60Hz 220V/50Hz 220V/60Hz	1/3	6.5 3.25	R134A	23 Cu. Ft. 651 L	28°F/-2°C to 39°F/4°C

- Single glass door for visual appeal.
- Stainless steel exterior and interior ensures years of long life and maximum durability
- Simple plug-in installation
- Internal storage capacity is 23 cu. ft / 651 L
- CFC-free polyurethane foam insulation
- (3) heavy-duty, adjustable, PE coated wire shelves
- Door locks and 5" diameter swivel casters come standard
- Utilizes environmentally friendly CFC-free R134A refrigerant,
- Bottom mount compressor provides energy savings and ease of service
- Automatic defrost system
- Digitally controlled temperature system maintains optimum temperature and LED display is easily viewed from exterior
- Holding Temperature: 28°F/-2°C to 39°F/4°C
- Open door alert, beeps when door has been open for 5 minutes
- Large evaporator and condenser for quick cooling and greater efficiency
- Horsepower: 1/3 HP
- Automatic interior lighting
- Self contained system