



The Legacy Companies  
3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331  
Sales: (954) 202-7419 • Sales@TheLegacyCompanies.com  
Tech Service: (877) 368-2797 • Service@MaxxHelp.com

Project Name: \_\_\_\_\_  
Location: \_\_\_\_\_  
Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
Model: \_\_\_\_\_

www.MaxximumFoodService.com

## HOTEL ICE DISPENSER

Model: ☐ MID200

☐ MIDX200

International Model: Add -50 (220V/50Hz/1Ph) or -60 (220V/60Hz/1Ph)



Shown with Maxx Ice Ice Maker - sold separately



MID200  
90° Corners



MIDX200  
Rounded Corners

Maxx Ice Hotel Ice Dispensers deliver a high-capacity storage and easy to use ice dispenser solution. The MID200 & MIDX200 will fit any 30" modular ice maker including the entire range of Maxx Ice Modular Ice Makers (available with various ice production capacities to suit your needs.) These dispensers feature easy to use push button operation and a lift wheel agitation/dispensing system to prevent ice clumping.


### FEATURES and CONSTRUCTION

- 190 lbs. (86 kg) Ice Storage Capacity
- 30" (762 mm) Wide
- Regular Timed Agitation Keeps Ice Cubes Separated in Storage Bin
- Push Button Ice Dispensing
- 304 Series Stainless Steel Exterior
- Large Sink Accommodates Most Hotel Ice Buckets
- Urethane Foam Insulated Cabinet
- Large Drain Pan to Collect Overflow
- Will Dispense Various Cube Sizes
- Available with 90° corners (MID200) or rounded corners (MIDX200)

### ELECTRIC

115V/60Hz/1 Ph (NEMA 5-15P)

208-230V/60Hz/1 and 220V/50Hz/1 are available as options



NEMA 5-15P



Intertek  
Certified to  
ANSI NSF 012



Intertek  
Certified to  
ANSI UL 563

### Maxx Ice WARRANTY (USA / CANADA)

Three (3) years parts  
Three (3) years on-site labor  
Five (5) years compressor (part only)  
Administered by The Legacy Companies, 877.368.2797

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

The built in performance enhancing functions ensure that given proper attention and preventative maintenance, each Maxx Product will deliver years of trouble free, reliable, low maintenance, efficient operation.

12/14/17 D




The Legacy Companies  
3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331  
Sales: (954) 202-7419 • Sales@TheLegacyCompanies.com  
Tech Service: (877) 368-2797 • Service@MaxxHelp.com

Project Name: \_\_\_\_\_  
Location: \_\_\_\_\_  
Item #: \_\_\_\_\_ Qty: \_\_\_\_\_  
Model: \_\_\_\_\_

www.MaxximumFoodService.com

## HOTEL ICE DISPENSER

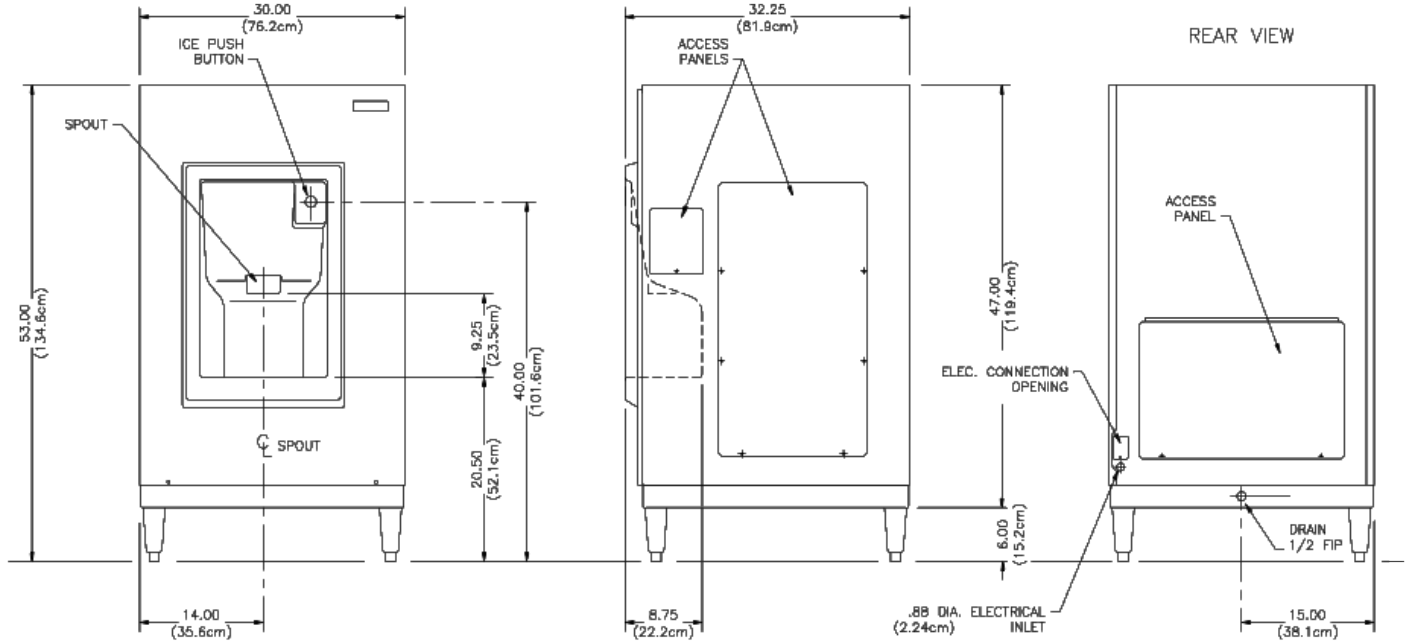

If paired with a Maxx Ice MIM500N Modular Ice Maker the overall combined height becomes 74".  
Most commercial ice makers will result in a total combined height under 80".

Model	Electrical Service	Amp Draw	Electrical Rating	Storage Capacity	Corner Style	Operating Temperature Range	Operation	Drain	Dimensions (Including Legs) In (mm)	Shipping Weight
MID200	115/60/1	2.1A	NEMA 5-15	190 lb (86.2 kg)	90°	45°F – 90°F (7°C – 32°C)	Push Button	½" IPS	30" x 32.3" x 53" (762 x 820 x 1346)	230 lb 104 kg
MID200[F0]	208-230/60/1	1.2A	NEMA 6-15							
MID200[E0]	220/50/1	1.2A	15 Amp International							
MIDX200	115/60/1	2.1A	NEMA 5-15		Rounded					
MIDX200[F0]	208-230/60/1	1.2A	NEMA 6-15							
MIDX200[E0]	220/50/1	1.2A	15 Amp International							

Installation must conform to applicable local codes and ordinances.  
Use of a qualified licensed technician is suggested.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.  
While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.  
By using the information provided, the user assumes all risks in connection with such use.